

Improving Performance & Harvesting Rainwater, by Cooling and Cleaning Solar Panel Intelligent System.

Ra'ed Nahar Mayyas^{1,2}, Mohammad Al-Dabbasa³, Marcos Tostado-Véliz²,

Francisco Jurado^{2,*}

1. *Department of Electrical Engineering of University of Jaén (Spain) & Jordan Design & Development Bureau (JODDB) (raidmayyas@yahoo.com).*
2. *Department of Electrical Engineering of University of Jaén, Linares 23700, Spain (e-mail: mtostado@ujaen.es (M.T.-V.) and fjurado@ujaen.es (F.J.)).*
3. *Mechanical Engineering Department, Mutah University P.O. Box 7, Mutah, Karak 61710, Jordan (madabbas@mutah.edu.jo).*

** Correspondence: fjurado@ujaen.es*

Abstract: Photovoltaic (PV) systems need regular washing to avoid efficiency degradation. Dust deposition on the surface limits solar penetration into photovoltaics and consequently the PV output. Efficiency may fall by 50% after a month without cleaning the modules. This effect strongly depends on the area, being desert climates more problematic because of the proliferation of dust particles and eventual high wind speeds. This research aims to illustrate the idea of an innovative intelligent device with wide applications and advantages, which improves the efficiency of solar cells by a self-cleaning mechanism, keeping the temperature of solar cells from rising, recycling the cleaning water, and harvesting rainwater falling. In this research, an experiment was performed in the city of Salt (Jordan) to investigate the purification of solar cells at the energy production plant above the Najashi Mosque. To clean the dust periodically, an automated cleaner was installed that detects the dust on the solar panel and automatically cleans the module. Various cleaning methods were compared: manual cleaning, automatic cleaning, manual injection water, compressed air. The new proposal has proven its superiority over all of these cleaning techniques, making it the ideal device for resolving cleaning difficulties, high temperatures, and increasing solar cell performance without a doubt. It was also utilized to gather rainwater by employing the vast areas of solar cells scattered over the world. The findings of this study may help in preserving the environment by harvesting sun and rainwater, enhancing PV efficiency, and achieving decarbonization in the energy industry.

Keywords: Photovoltaic; Renewable energy; Harvesting Rainwater; Dust deposition; Solar Panels Cleaning; Cooling System.

1. Introduction

Renewable power generation accounted for about 29% of worldwide power generation in 2020 [1] a two-percentage-point rise annually. Renewable power installations must rise substantially to meet the net-zero emissions by 2050 Scenario's contribution of more than 60% of generation by 2030 [1]. During the period 2021-2030, annual generation must expand at a pace of almost 12% on average, about twice as much as it did from 2011 to 2020 [1].

Solar energy refers to all of the Sun's 1.2×10^{17} W of solar power that reaches the Earth. Solar energy is used in two ways to improve our lives: solar heating and solar power. Direct conversion of solar energy to electricity is now widely recognized as a viable source of energy. Photovoltaic (PV) cells create energy through a process known as the photovoltaic effect [2]. Most silicon-based PV cells were among the first to be invented, and they are still the most extensively used to generate electricity [3]. Normally, the solar cell absorbs two-thirds of the sunlight that falls on the panel's surface, and one-third of the sunlight that reaches the panel's surface has a possibility of being reflected. The front glass is the heaviest element of the solar module and serves to protect and ensure the strength of the complete photovoltaic module while maintaining a high level of transparency. Depending on the type of glass used, the thickness of this layer might range from 2 mm to 4 mm. It is critical to maintain the cleanliness of this layer in order to benefit from its properties such as spectrum transmittance, and light transmittance [4].

Renewable energy has the advantage of being environmentally friendly, which means it is "non-harmful" to our environment. It is plentiful and a naturally occurring resource. Despite the development of new higher-performance materials, photovoltaic systems' primary drawback is their low efficiency in converting sunlight to electrical energy, which ranges from 12 to 20% [5].

Not all the bright radiation is converted into electric power by PV Panels since most of it is wasted due to a variety of factors that influence PV panel efficiency. The primary elements that impact the panel performance cover the dust deposition, temperature increase in the unit, sunlight spectrum, panel orientation, and angle of inclination [6]. This work is focused on dust depositions and how they affect the efficiency of solar panels. Fig. 1 shows the factors that mainly influence dust settlements [7].

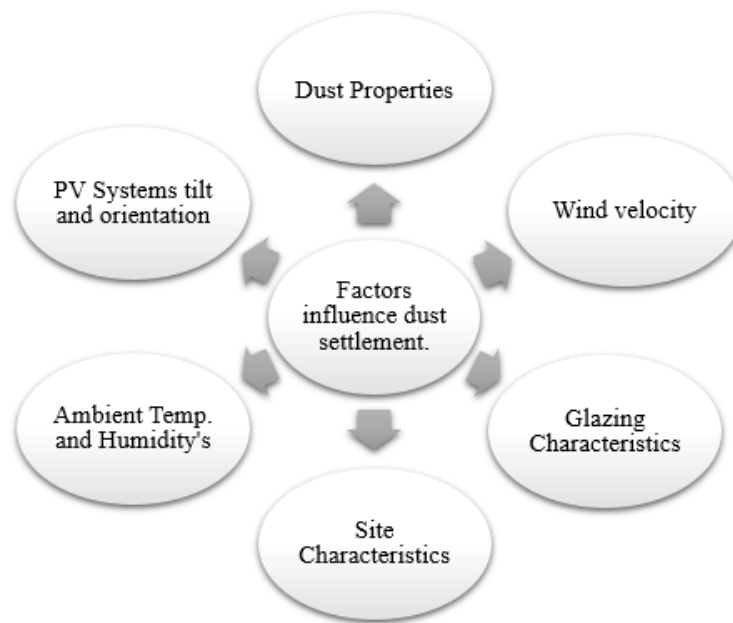


Figure 1 - Factors influencing dust settlements (adapted from [7])

Frequently, dirt particles have a diameter $< 10 \mu\text{m}$, although this fact strongly depends on the location and environment [8]. Two factors influence the efficiency degradation. On the one hand, the properties of dust include the dimension of particles, form, and color [9]. As a result, each sample is vulnerable to dust particle adhesion on every surface. On the other hand, the local atmosphere, including the system installer which indicates if the system is mounted on the ground, grassy plain, or mountainous area. The atmospheric conditions also include humidity and wind speed, which are responsible for the resistance of particles of dust to the surface of modules [10]. In this regard, low-speed winds

typically improve the module surfaces' dust concentration, whereas high-speed winds eliminate dust and instead clear surfaces. The concentration of dust on panels' surface varies, however, depending on the geometry and the direction and intensity of the winds in that geographical area of the deployed PV system [11]. In contrast, heavy rain and melting snow can be beneficial, removing partially or totally the dust accumulated in panels, thus restoring the module's efficiency [12]. Rugged surfaces are also more problematic than smooth ones, propitiating the accumulation of more dust. Often, the dust itself increases the volume of dust; once the first layer of dust is accumulated, it makes a better roof for more dust particles to adhere to. Horizontal surfaces appear to create more dust because of gravity than vertical and inclined surfaces. Hence, coarse particles can be retained in horizontally inclined panels although only thin particles can be retained in vertical panels. [13]. To illustrate how the dust particles may be accumulated in solar panels, Fig. 2 shows various photographs taken in Al-Najashi mosque in the city of Al-Salt Jordan,(32.04495113379291, 35.72260932101531). These panels were exposed to mineral dust and agricultural emissions, due to the nature of the geographical area.



Figure 2 - Exemplary photographs of soiling mineral dust in Al-NAJASHI mosque, Al-Salt, Jordan

The performance of PV modules in different places is affected by environmental variables that vary from place to place across the world. Solar radiation, wind velocity, rainfall, temperature, humidity, and the likelihood of dust present are all factors that might

affect PV module performance [14]. Although the effect of dust depositions may be appreciated worldwide, its effect is more notably in arid climates due to an increase in dust deposition in time, usually called pollution loss [15]. The Middle East has the worst dirt build-up regions, with peak losses ranging from 10% to 70% [9].

Due to the fine particles' ability to spread and cover the PV surface, fine dust particles degraded PV performance more than coarse dust particles. Furthermore, a carbon deposit of 28 g/m² reduced PV module power output to more than 73 g/m² of cement or 250 g/m² of limestone. They identified carbon as the cause of effective solar radiation absorption, which harms PV performance [16]. For varied quantities of carbon-based ash deposited on PV panel surfaces, Qasem et al. [17] examined the influence of air pollution on PV panel performance. For the varying amounts of ash deposited on the PV panel surface, they compared the power output drop of the intentionally polluted panel with the clean one control. The panel power output decreased by 2.3 %, 7.5 %, 17%, and 27 % for ash mass depositions of 0.63 g/m², 1.89 g/m², 3.15 g/m², and 3.78 g/m², respectively. Other studies showed that the efficiency of PV modules may decrease by 50% in some arid climate regions [18]. Typically, solar panels are cleaned periodically by some qualified personnel using two different methods dry and wet cleaning, as dry cleaning is more common in desert and dry areas, and is often used due to lack of water or difficulty in accessing it. One of the disadvantages of dry cleaning is that it may cause scratches on the first glass layer in the solar cells, which causes permanent damage to the panels. As for wet cleaning, it spreads in areas where there is a nearby water source and in-home systems, with easy access to the panels for cleaning. Water or other cleaning fluids can be used, depending on the type of spots that are on the solar panels.

The major contribution of this study is the development of a pilot platform to improve photovoltaic system efficiency by cleaning solar cells in the simplest, cheapest, and safest

method possible. This is accomplished by installing a light and intelligent system that performs soft self-cleaning as needed to repel all potential contaminants on the PV panel's surface. Furthermore, the method allows users to collect rainwater on the panel's surface and utilize it for irrigation or other purposes, improving the unit's performance ratio and power output. The controller, water pump, water gutter, pipes, reservoir, sprinklers, clamps, temperature sensor, and filters are among these components. The technology has no effect on the panels because it simply utilizes water to clean them, and it requires no more maintenance than replacing water filters on a regular basis.

The described mechanism aims to solve the cleaning problem definitively, with the possibility of using it in all places as an alternative solution to water shortages in the desert and dry areas, thus eliminating the method of dry cleaning by collecting rainwater and using it for cleaning and recycling cleaning water by passing it through dedicated filters, and it can also be used to exploit and clean existing solar cells. In difficult-to-reach places, such as tile roofs.

In the rest of this paper, Section 2 analyzes the effect of dirt on solar panels efficiency. Section 3 reviews some conventional cleaning methods, highlighting their main advantages and disadvantages. Section 4 analyzes the costs of cleaning solar panels. Section 5 describes in depth the proposed cleaning mechanism. This paper is concluded with Section 6.

2. The effect of dirt on solar panels efficiency

The efficiency of a solar panel is determined by various factors. The efficiency of a solar panel cell is based on how much incoming sunlight it can convert into useful power. But what elements go into determining the final conversion rate? When designing and

manufacturing high-efficiency solar panels, PV cell researchers and manufacturers consider the following factors:

- **Material** - The kind of material (monocrystalline silicon, polycrystalline silicon, cadmium telluride, thin-film, and so on) influences how light is converted to electricity.
- **Reflection** - A solar panel's efficiency may be reduced if the light is reflected away from it. The importance of the glass layer on top of silicon solar cells is due to this.
- **Light wavelength/frequency** - Light is made up of photons, which vibrate at a variety of frequencies to produce the visible and invisible light released by the sun. Depending on their frequency and wavelength, some photons are reflected, some pass right through, and others are absorbed when light strikes the surface of a PV cell. Some of the absorbed light may be converted to heat, while the remaining photons have enough energy to free electrons from their atomic bonds, resulting in an electric current.
- **Positioning and angle** - Proper solar panel installation and an optimal angle are essential for capturing the most amount of sunlight.
- **Temperature** - The efficiency and energy of PV modules both decrease linearly with increasing operating temperature, according to a correlation between solar energy efficiency and energy dependence on temperature. As the ambient temperature rises, the power of the PV modules decreases by 0.5 %/°C, and the efficiency decreases by 0.05 %/°C [19]. And the efficiency of the dusty photovoltaic panels is measured, the average daily efficiency decreases from 0.607% to 0.768% daily. During a 6-month experiment, the energy loss due to dust ranged from 8.140 kW/m² to 10.282 kW/m²,

which corresponds to the average daily loss due to dust accumulation of 1.03 and 0.82 USD per day.

- Climate - The effectiveness of your solar panels might be affected positively or adversely depending on where you live and the sort of weather you have.
- Shade - Even a slight shadow on a single panel might reduce the overall efficiency of the system. It all comes down to turning more incoming sunshine into electricity in the end.
- SunPower brand is the foremost effective solar panel on the market nowadays, with proficiency evaluations as tall as 22.8%, even though the bulk of panels have proficiency evaluations extending from 16% to 18% [20]. A wide range of research on the influence of dust has been undertaken across the world, although the environment and period are different. In important studies on the effect of dust on solar photovoltaics [21]. El-Shobokshy and Hussein [22] discovered that cement particles at 73 g/m² would result in a significant drop in PV short-circuit voltage, i.e. by 80%. Interestingly, it was discovered that the smaller the particle size of a certain deposition density, the greater the reduction in solar irradiation received by the solar panels. This was most likely owing to finer particles' stronger capacity to decrease inter-particle gaps, blocking the light path more than bigger particles, as proven in another study of a similar kind by Sulaiman, and Hussain, [23].

The reduction in power output caused by dust collection is determined not only by the time of module exposure but also by the frequency and intensity of dust. As a result, it is suggested that installed PV modules be cleaned at least once every two weeks. However, anytime a sandstorm happens, the solar modules should be cleaned as soon as possible, as a single dust storm can decrease the power output of a PV module by up to 20% [24].

Fig. 3 represents the results of solar energy generation from solar panels in five distinct

conditions: clean, talc, dust, sand, and moss. The experiment was carried out in a laboratory by exposing the solar cells to the following light sources: 12 V Bulb 21/5 W, 12 V Bulb 10 W, 12 V Festoon Bulb 10 W, 12 V Motor 18 W, and 12 V Bulb 8 W.

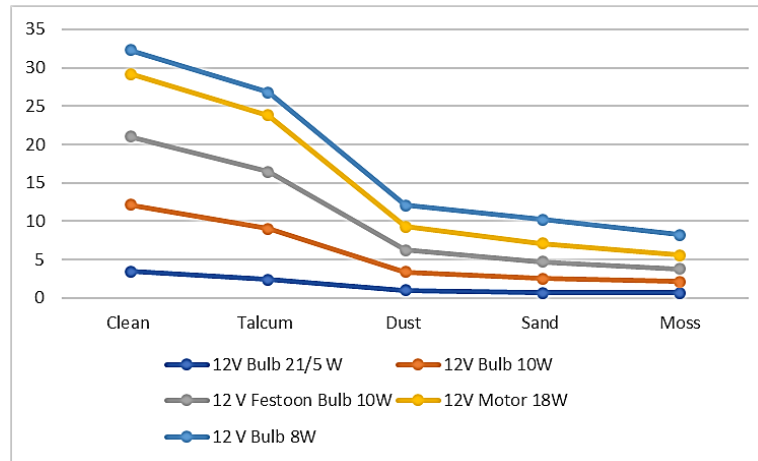


Figure 3 - Outcomes of generating solar energy from solar cells in five different conditions: Clean, Talcum, Dust, Sand, and Moss, respectively [21].

The results of the above experiment prove that the generated solar energy decreases significantly during the generation of dirt on the surfaces of solar cells, as this dirt varies according to the surrounding environment.

Fig. 4 analyzes the yearly financial cost of efficiency loss due to dirt and dust accumulation for solar farms of various capacities. the amount of annual cost loss due to dust collection is projected to dramatically rise, especially for bigger solar farms. A simple calculation indicates that each solar farm's annual loss due to dirt collection might be in the hundreds of thousands of euros. As a result, selecting an appropriate and cost-

effective cleaning process will boost maximum lower production while reducing environmental impact [25].

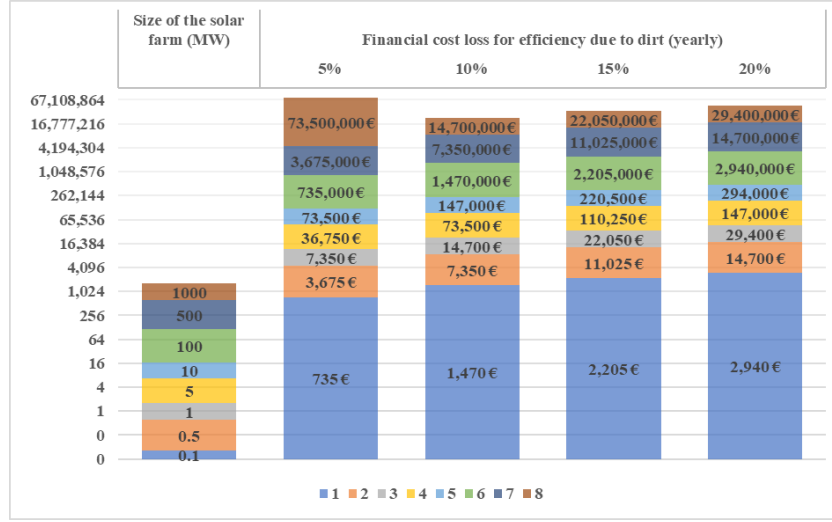


Figure 4 - Annual financial cost of efficiency loss due to dirt and dust accumulation, based on data from [26]

the following equation is used to calculate the system's efficiency (η):

$$\eta = \frac{P_{out}}{P_{in}} \quad (1)$$

where P_{out} and P_{in} represent the input and output power, respectively. Entire PV system (1) is related to cell efficiency (η_1), cell operating temperature (η_2), losses due to Joule effect on conductors as PV-transformer (η_3), inverter efficiency (η_4), maximum power point tracking (MPPT) (η_5), and finally panel soiling surface (η_6) [25]. Thus, PV system's efficiency may be expressed as follows:

$$\eta_{pv} = \eta_1(t) \cdot \eta_2 \cdot \eta_3 \cdot \eta_4 \cdot \eta_5 \cdot \eta_6(t) \quad (2)$$

It is expected that η_{pv} fluctuates over time as a result of both cell degradation ($\eta_1(t)$) and dust accumulation ($\eta_6(t)$) during PV system operation [25].

3. Conventional cleaning methods

Many studies on various techniques for cleaning PV panels with water have been conducted. Furthermore, considerable effort has been expended in the development of water-free approaches. Such integrated studies are rapidly becoming an important

solution for producing more electricity and conserving water. Cleaning approaches can be broadly classified as follows after reviewing various studies.

3.1 Manual Solar Panel Cleaning Systems:

Many methods can be used to clean solar cells besides manual cleaning, for example, natural cleaning (wind, rain, melting snow), water cleaning, hydrophobic surface, ultra-hydrophilic surface, and electrodynamic screen in photovoltaic cleaning [26]. Cleaning was traditionally done by humans. Manual cleaning has drawbacks such as the risk of employee injuries and panel damage, movement difficulties, and poor maintenance, etc. [27]. This technique needs a lot of repetition and can be time-consuming. If human labor is required to clean the surfaces, non-conductive materials such as brushes, cloths, and other items should be utilized to avoid electrical damage and limit the danger of electric shock [28]. The amount of water consumed is affected by environmental conditions. In the Middle East, for example, solar panels consume 0.5 L/m² [29] When cleaning large-scale PV power plants, such as MW PV power plants, manual cleaning requires more people, takes longer, and is difficult to clean all panels at once. Many water-based cleaning solutions for PV panels are being investigated, however, water is required for all of them. We are unable to utilize that procedure in all places due to water constraints in many places [30].

3.2 Vacuum Cleaning

A vacuum suction cleaner is a device that employs an air pump to generate a partial vacuum to collect dust from carpets, windows, and other surfaces. The vacuum cleaner motor, which provides suction pressure, is usually supplied with an electrical feed. The vacuum cleaner's power usage is measured in watts, which is insufficient to explain the cleaner's efficacy. In the end, the input power is transformed into the airflow and measured in air watts. Because physical motions on the panel with cleaner are unavoidable, thorough operator training is required. Scratches and dust build up over time, resulting in poor solar insolation absorption [31].

3.3 Electrostatic Precipitator

Without causing any physical contact, the Electrostatic Precipitator cleans and maintains the panel's top surface. An electrostatic precipitator (ESP) is a filtration device that removes microscopic dust particles from the surface of a solar PV panel using the force of an induced electrostatic charge. The electrodes of the ESP receive power through a relay when the Arduino controller signals after collecting the weight of the PV panel and comparing it to a specified value. The negative electrodes of the electrostatic precipitator establish a negative charge on the dust particles on the panel's surface [32]. The dust particles accumulate at the positive electrode after being attracted. A non-contact dust cleaning can be achieved using this method. It is efficient at cleaning, eliminating more than 90% of collected dust in less than 2 minutes without the need for water or other mechanical materials, and it can utilize the energy provided by the panels [33], not suitable for collecting gaseous contaminants, and it's not a safe method for homes who

use solar panels since the panel may shake, loosening its attachment to the roof and causing damage if it falls.

3.4 Coatings with nanoparticles

Scientists at the International Advanced Research Centre for Powder Metallurgy and New Materials (ARCI) unit of India's Department of Science and Technology have developed a solar panel coating to prevent dirt from accumulating in harsh environments. In India, a combination of high temperatures, high humidity, and high pollution reduces PV panel efficiency. The nanoparticle-based technology repels dust so that it is easily washed off with water and is highly transparent so that the coating does not reduce panel efficiency. Applying an additional coating to a clean PV module's surface will not always boost its efficiency. In reality, an additional layer will very certainly diminish sunlight transmissivity. It's essential to remember that efficiency is only obtained when the dirt-induced lower light transmission is eliminated with the assistance of the coating. To keep the PV modules clean, you'll need to wash them regularly.

3.5 Automatic Wiper Cleaning Systems:

To run the brushes or wipers, a set of mechanical apparatus like motors or robots is required, and to clean the PV panel surface, a water storage tank with sprinklers is used [34]. Cleaning robots' power consumption varies depending on the angle of the solar panel, the wind speed, and the thickness of the dirt layer. It has been proven that when the wind speed rises, the robot's power consumption increases [35].

At the beginning of the research, an experiment was made to clean the solar cells using one of the mechanical methods, and the car wipers were used for cleaning, as they showed a kind of efficient work, but on the other hand, we found some problems and observations like wipers do not cover the entire area of solar panels, the wiper blade must be tested every six months and replaced once a year, resulting in a comparatively high

maintenance expense, the squeegee and metal wheels should be checked frequently to avoid problems such as skipping or scratching and the solar panels. Fig. 5 shows the wiper mechanism prototype used to clean the surfaces of solar panels, and Fig. 6 shows the 3D-CAD model for the wipers mechanism of a solar panel.



Figure 5 - Cleaning solar panels by car wipers, a pilot project

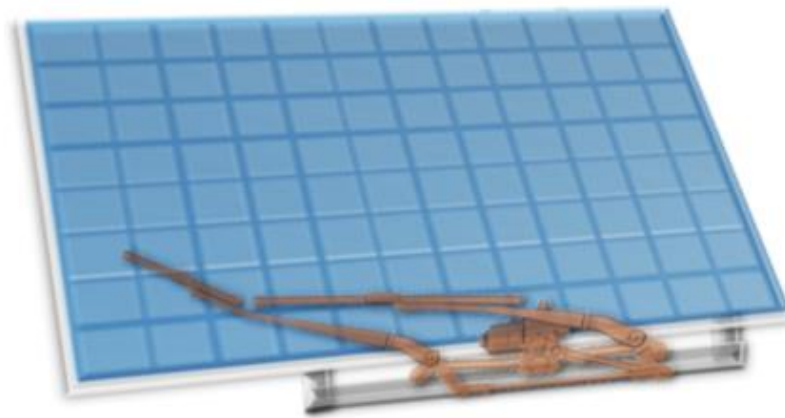


Figure 6 - Car wipers 3D CAD Model and simulation.

3.6 Robotic cleaning solutions

There are various industrial-grade robotic cleaning technologies now available. Depending on factors such as cost, the convenience of usage, and performance rate. etc.

Cleaning robots are commonly utilized. One of the most well-known is RobuGLASS, which uses a water-based technique to clean the entrance to the glass pyramid of the Louvre Museum in Paris, France [36]. Cleaning robots must be operated on the surface of the solar panels to clean them. Photovoltaic panels, on the other hand, are slanted at an

angle to increase solar radiation absorption. As a result, robots must have a method for committing to walking on the surface of the PV panel. There are two types of attachment systems created for robots to walk on sloping surfaces [37]. Some of the existing autonomous robots on the worldwide market are poor at cleaning solar panels due to their large weight [38] and a place is allocated to the beginning of each row for the device to stand in without casting a shadow on the panels, and the device is programmed to move on each row of panels separately.

The pros and cons of the most prevalent cleaning technologies for solar panels are shown in Table 1. As it highlights the cleaning quality, labor risk, panel damage risk, water and electricity consumption, and cost of the most common cleaning techniques used to clean solar panels.

Table 1: comparison of cleaning technologies

	Cleaned Surface Quality	Labors Injuries Risk	Electric Shock Risk	Panel Damage Risk	Water Wasting	Electricity Consumption	Cleaning Cost
Intelligent Cleaning	High	-	-	-	-	-	Low
Manual Cleaning	Visual Method	High	High	High	High	Low	High
Vacuum Cleaning	Visual Method	High	Low	High	Low	High	Low
Electrostatic Precipitator	Low	-	-	-	-	Low	High*
Automatic Wiper Cleaning	Low	Low	Low	High	Low	Low	High*
Coatings With Nanoparticles	Low	-	-	-	Low	-	High*
Robotic Cleaning Solutions:	High	Low	Low	High**	Low	Low	High*

Low cost = Electricity cost.

Medium Cost = Electricity + Water.

High cost = Electricity + Water+ Labor cost.

* Capital Costs.

**Due to robot weight.

4. Cost evaluation of cleaning solar panels

Pollution is one of the factors affecting the cost of operation and maintenance. As a result, they must be considered, especially in desert areas, the cost of cleaning PV systems is mostly determined by the frequency with the economics of removing dirt and snow off PV systems that have been researched in three different European areas [39]. the results of this research showed that there is no economic advantage to cleaning in Helsinki (Finland) and Stockholm (Sweden), however, there is an economic gain in places like

Murcia (Spain) and Munich (Germany) [28].in which they are cleaned over a certain period depending on the month [40].

In Jordan, PV panels have an average daily cleaning cost of \$ 0.212/kWp [41], and costs of cleaning 15-20 solar panels for residences in Jordan come to an average of 900 € a year if a company is hired to clean solar panels twice a month throughout the year. the cost varies from one home to another, based on factors such as the slope of the roof, the height of the house, and the size of the system [41]. The overall cost for various cleaning methods is determined using operational expenses, capital costs, and equipment lifespan, as shown in table 2 and Fig. 7 and 8.

Table 2. Estimated cleaning PV panels cost in Jordan using different methods [42].

Cleaning Equipment	Unit	Brush	Microfiber Wiper	Hiring a Cleaning Company	Intelligent System
Duration of Cleaning / Panel	Minute/panel	1	0.75	4	0.2
Electricity Cost of Cleaning / Panel	€ /panel	0	0	0.000021	0.00001
Manpower Cost	€ /panel	0.25	0.19	2.5	0
Cost of One Cleaning / Panel	€ /panel	0.37	0.29	2.500021	0.00639269
Total Yearly Cost of Cleaning / Unit PV Panel	€ /Panel/year	26.42	21.07	60	1.56

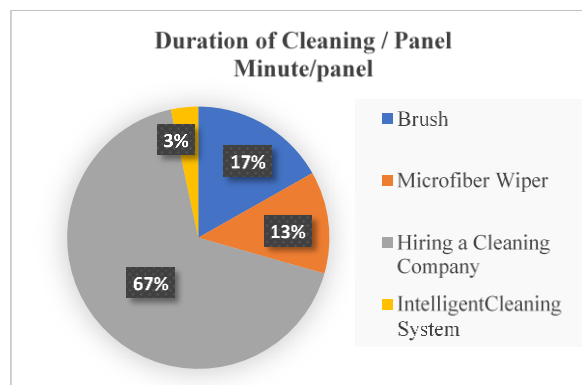


Figure 7 - Duration of cleaning panels [42]

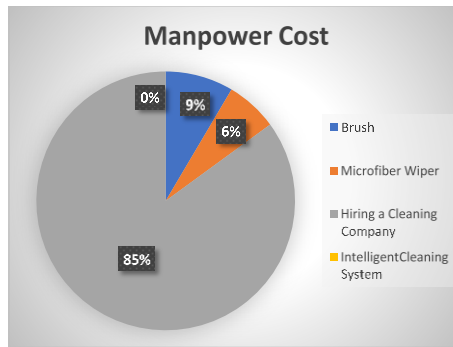


Figure 8- Solar panel Manpower cost [42]

According to Table 2, the most expensive cleaning method is hiring a company to clean the panels regardless of the cleaning method, which costs around 60 €/panel annually, followed by manual cleaning with brushes and or wipers, which costs between 21 and 26 €/panel annually. In addition, it takes a long time and consumes a lot of energy. finally, the intelligent cleaning system has the lowest cost of any panels cleaning system, at 1.5 €/panel annually, which sets it apart from other solar panel cleaning systems, these findings demonstrate how combining a few strategies can make things easier and less expensive.

5. The proposed cleaning system

Solar Panel Intelligent System Cleaning, Cooling, Rainwater Harvesting, and Performance Enhancement Technology is an automated cleaning device used to solve the main two factors that limit PV system power generation the high PV temperature & the reduction in radiation on the solar panels due to soiling, in addition to the possibility of using the system in desert places that lack water, where the system can harvest rainwater in the winter and use it for cleaning at all times.

5.1 Foundations

The pilot system is situated in the summer on the roof of the Najashi Mosque in Al-Salt, Kingdom Hashemite of Jordan, the intelligent system was designed and developed to take advantage of the inclination of solar panels to collect rainwater in designated tanks

through a gutter, then the water is from the rainwater tanks to the tank designated for cleaning the solar cells, which pumps water through pipes to the sprinklers and then is collected through the gutter to return to the designated tank for solar cells. Sprinklers put on the panels' edges interfere with the spreading water, which therefore moves dust and heat away from the panel surface. the system's components are very durable and low-cost standardized items. the system can be built with a stationary duct assembly to bring water to the panel or as a movable set of equipment that can be moved to the cleaning and cooling site. This is dependent on the applications and the overall system cost.

The intelligent device may be mounted for any size or number of solar panels. Fig. 9 shows the three-dimensional model used to perform engineering calculations to determine the water pump and air compressor capacities, as well as the number of sprinklers. Fig. 10 shows realistic photographs after producing the system's prototype.

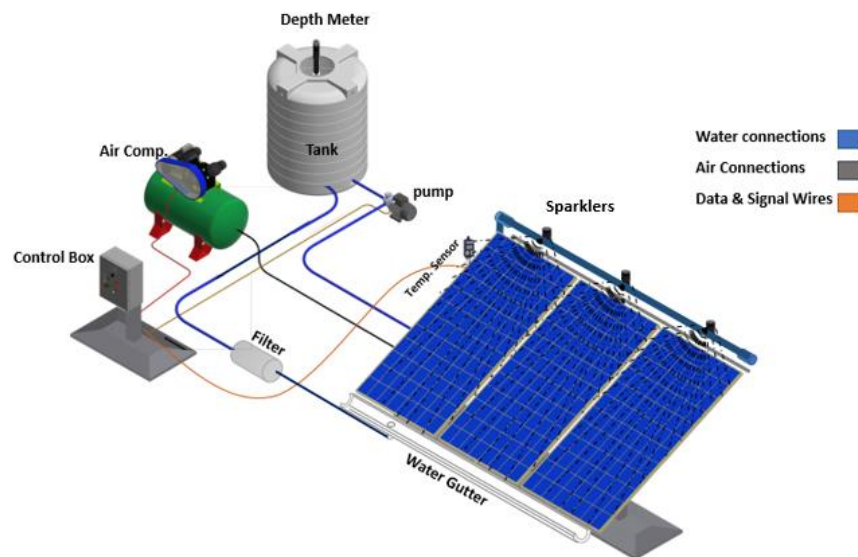


Figure 9 - Solar panel intelligent cleaning system, 3D CAD model



Figure 0010 - Intelligent cleaning system, pilot project

As briefly explained above, the system that was implemented and developed was designed as a test field where more than one technology was integrated into the system, making it efficient, intelligent, environmental, economic, and many other features that make it superior to other cleaning systems. In three minutes, up to 95% of the dust from PV panel surfaces can be removed by this device.

5.2 System Components.

As briefly stated above, many built-in components make up the system that works harmoniously to ensure that the solar panels are clean at all times, these components are:

5.2.1 Air Compressor, pipes and Air Nozzles

An air compressor was installed and connected to special pipes to clean the dust by blowing air through small air holes installed on the roofs of the solar cells to clean the dust as an initial stage before operating the water sprinklers, but it was found to be ineffective after testing because the amount of air coming out of the holes was insufficient to remove the dust, in addition, the air compressor consumes a lot of electricity, making it uneconomical, Fig. 11 illustrates the air cleaning components utilized in the pilot project for an intelligent cleaning system.



Figure 11 - Air cleaning components utilized in intelligent cleaning system pilot project.

5.2.2 Water Pump

The water pump operates automatically by receiving a signal from the controller, which draws water from the tank and pushes it towards the sprinklers installed above the solar cells. The pump stops three minutes after all dirt and dust stuck to the solar panel body has been removed. A 0.5 CV water pump power was used, and the amount of electricity consumption when the pump is running for a full hour is estimated at 373 W or 0.373 kW, and this amount of electricity is sufficient to operate the system for a period of up to (a month), depending on the nature of the geographical area and the need for the frequency required to operate the system.

5.2.3 Control Unit

The timer inside the control unit box has been programmed to send a signal to the water pump to work every 8 hours for 3 continuous minutes (3 times per day), which is enough time to clean the solar panels of dust or bird droppings before they stick and dry completely, as removing bird droppings becomes very difficult if they spend a long time on the surfaces of the solar cells. It is worth noting here that the geographical area must be studied before programming the system, as the type of dust and dirt that may accumulate on the surfaces of the solar cells can increase or decrease the time required for cleaning. It can also be linked to a thermal sensor installed on the roofs of the solar

cells, which sends a signal to start the pump if its temperature rises above 45 °C. This will reduce its temperature and, as a result, increase its efficiency. Fig. 12 shows the control unit used in the project.

$$Working \frac{time}{year} = 3 \text{ min} \cdot 365 \text{ day} = 1,095 \text{ min/year} = 45.6 \text{ h/year}$$

$$Yearly \text{ energy consumption} = \frac{45.6h}{year} \cdot 0.373Kw = 17 \text{ kWh/year}$$

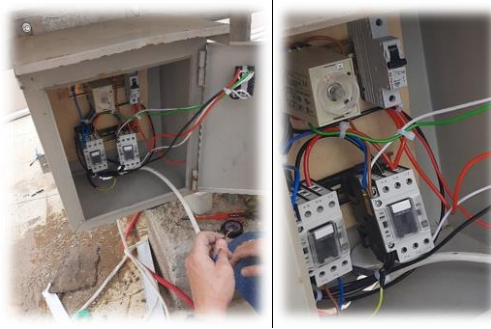


Figure 12 - Control unit utilized in the pilot project.

5.2.4 Temperature Sensor

The surface temperature sensor is installed on the back of PV modules to operate the system in an exceptional cycle if the panel temperature exceeds 30 °C. Although water affects the light-absorbing unit, the increase in energy yield can be obtained entirely by keeping temperatures below 30 °C.

5.2.5 Water Tank

The water required to clean the solar cells is withdrawn through the water tank depicted in Fig. 13 below. In exchange, the tank is supplied with two water sources: rainwater from the roofs of solar cells and water recycled during cleaning, with 80 percent of the water that is pumped to clean the cells returning to the tank. The remaining 20% evaporates into the atmosphere after the solar panels have been filtered.



Figure 13 - Water tank used in the project

5.2.6 Sprinklers

The sprinklers or water nozzle is a precise device that allows water to be dispersed in a mist. Nozzles serve three functions: they disperse a liquid across an area, they enhance the surface area of a liquid, and they provide an impact force on a solid surface [43]. Fig. 14 shows the water sprinklers used in the project.



Figure 14 - Water sprinklers used in the project

5.2.7 Water gutter

To collect the water that fell on the surfaces of the solar cells, whether it was rainwater or cleaning water, the joints between the solar panels were sealed with adhesive tape, and a gutter was installed at the ends of the solar panels and connected to the other end with the water tank to capture every drop of water.

5.2.8 *Water Connections, Filters, Valves, Mounting Brackets, Water Depth Sensor, Electrical Wiring, and Many Other Components.*

Cleaning sprinklers are mounted on variable-height bases to allow for easy adjustment of sprinkler heights. The water nozzles allow to change the spray angle, volume, and pressure of the water. This feature enables for the greatest cleaning outcomes. This is part of the design philosophy of investigating and identifying the most effective strategy to clean solar PV systems while consuming the least amount of energy and resources.

5.3 **Salient features of the proposed cleaning mechanism**

Some of the most salient features of the proposed cleaning system are numerated below. As seen, the investigated project overcomes most of the drawbacks of existing systems, especially regarding water consumption.

- a. No water consumption
- b. The system does not require refilling.
- c. Automatic on/off clean system.
- d. No moving parts or robotic elements.
- e. No manpower is required for cleaning.
- f. The surface of the PV panel remains clean always.
- g. It gives better efficiency compared to other traditional systems
- h. The system can operate for many years before requiring maintenance.
- i. Using the Internet of Things, the intelligent system can be monitored and controlled, such as turning it on and off, through a mobile phone.
- j. The system cost is negligible when compared to manual, robotic, or any other system.

Nevertheless, it is worth mentioning that the system can be ineffective if it is used to clean old stuck dirt on solar panels such as old bird dropping, and water filters need to be replaced periodically according to the frequency of use.

6. **Conclusions**

This study is of particular interest to PV system researchers, designers, operators, and owners because it proposed a new technique to avoid reducing PV panel efficiency and the frequency of optimal cleaning using internet of thing connection, particularly in semi-arid and desert areas in general, and Jordan, the Middle East, and North Africa in particular. Depending on the type of dust, energy loss in fixed solar panels might be significant. Dirt and bird droppings create patches in the solar panel that impedes light and can cause the panel to shut down temporarily. Cleaning the solar water panel improves its efficacy by removing much of the dirt on the panel. Automatic cleaning was far less expensive and less laborious than human cleaning, especially in facilities with a high number of solar panels or panels that are difficult to access. Furthermore, regular cleaning guarantees that solar panels are always clean and extremely effective. Cleaning the panels helps increase the efficiency by removing much of the dust on the panels. Automatic cleaning costs were much cheaper and less challenging than manual cleaning, especially in solar panels plants or panels that are difficult to access. Furthermore, frequent cleaning ensures solar panels are clean and highly effective at all times.

Solar panels intelligent cleaning system can be relied on to clean the panels in all places and conditions, and help in harvesting rainwater and the results showed that there is a great potential to use the photovoltaic system in rainwater harvesting, as the water harvested can be used in the domestic water. Finally, rainwater may be harvested and stored on the rooftops of big buildings for use as residential water, industrial, toilet tanks, and landscape irrigation. Furthermore, collecting rainwater after heavy rains would help limit the amounts of water seeping into the network and the risk of floods.

This project has a wider future scope that focuses on the use of Internet of Things technologies connected to portable weather stations and cameras to detect climate

conditions, this provides dust monitoring, enhanced analysis, and system control, which mandates an overall improved efficiency of the solar PV panel.

References

- [1] IEA, "Renewable Power, IEA,," 2021. [Online]. Available: IEA (2021), Renewable Power, IEA, Paris .
- [2] S.Roberts, in *Solar Electricity*, PrenticeHall, 1991, pp. 3-11.
- [3] F. Treble, "Milestones in the development of crystalline silicon solar cells," *Renewable Energy*, pp. 473-478, 1998.
- [4] "Ecoprogetti specialist in photovoltaic production process," 2014. [Online]. Available: <https://ecoprogetti.com/the-structure-of-photovoltaic-module/>.
- [5] T.M.RazykovabcC.S.FerekidesbD.MorelbE.StefanakosbH.S.UllaldH.M., "Solar photovoltaic electricity: Current status and future prospects status and future prospects.," *Solar Energy* 85 1580–1608, 2011.
- [6] K. Vidyanandan, "An overview of factors affecting the performance of solar PV systems.," *Energy Scan*, 2017.
- [7] P. R. Mani Monto, Impact of dust on solar photovoltaic (PV) performance: Research status, challenges and recommendations, *Renewable and Sustainable Energy Reviews*,, 2010.
- [8] M. Maghami, H. Hizam, C. Gomes, M. Radzi, M. Rezadad and S. Hajighorbani, "Power loss due to soiling on solar panel.," *Nature Nanotechnology*, 2016.
- [9] A. Ghosh, "Soiling Losses: A Barrier for India's Energy Security Dependency from Photovoltaic Power.," *Challenges* , 2020.
- [10] M. Mani and R. Pillai, "Impact of dust on solar photovoltaic (PV) performance: Research status, challenges and recommendations.," *sciencedirect*, 2010.
- [11] Z. Ahmed, H. Kazem and K. E. Sopian, "Effect of dust on photovoltaic performance: Review and research status.," 2013.
- [12] *. A. A. Seyfi S, evik a, "Performance enhancing and improvement studies in a 600 kW solar photovoltaic (PV) power plant; manual and natural cleaning, rainwater harvesting and the snow load removal on the PV arrays," *Renewable Energy*, p. 491, 2022.
- [13] A. E. Hegazy, "Effect of dust accumulation on solar transmittance through glass covers of plate-type collectors.," 2001.

- [14] Jordan*, "TECHNOLOGY AND CLIMATE TRENDS IN PV MODULE DEGRADATION," *National Renewable Energy Laboratory (NREL)*, 2012.
- [15] O. Bubnova, " Photovoltaics: Self-cleaning solar cells. *Nat. Nanotechnol.*," 2016.
- [16] Hamdy K. Elminir a, "Effect of dust on the transparent cover of solar collectors," *Energy Conversion and Management* 47 3192–3203, 2006.
- [17] Hassan Qasem1*, "Dust-induced shading on photovoltaic modules," *PROGRESS IN PHOTOVOLTAICS: RESEARCH AND APPLICATIONS*, 2014.
- [18] Dacheng Li *, "Study on the cleaning and cooling of solar photovoltaic panels using," *Solar Energy*, p. 1, 2021.
- [19] Kim JP, "Numerical analysis on the thermal characteristics of photovoltaic module with ambient temperature variation," *Elsevier*, 2011.
- [20] "<https://news.energysage.com>," Energy Sage, 15 Oct 2021. [Online]. Available: <https://news.energysage.com/what-are-the-most-efficient-solar-panels-on-the-market/>.
- [21] Shaharin Anwar Sulaimana, "Influence of Dirt Accumulation on Performance of PV Panels," *Energy Procedia* , p. 50 – 56, 2014 .
- [22] M. S. El-Shobokshy and F. M. Hussein, "Degradation of photovoltaic cell performance due to dust deposition on to its surface,," *Renew Energy*, vol. 3, pp. 585–590, , 1993.
- [23] Sulaiman, "Effects of Dust on the Performance of PV Panels," *World Academy of Science, Engineering and Technology*, vol. 58, pp. 588-593, 2011.
- [24] Muhammed J. Adinoyi a, "Effect of dust accumulation on the power outputs of solar photovoltaic modules," *Renewable Energy* 60 633e636, 2013.
- [25] Javad Farrokhi Derakhshandeh *, "A comprehensive review of automatic cleaning systems of solar panels," *Sustainable Energy Technologies and Assessments*, p. 3, 2021.
- [26] Jamil, "Performance degradation of photovoltaic power system: review on mitigation methods, *Renew. Sustain. Energy Rev.* 67," 2017.
- [27] Chetan Bhale1, "Solar Panel Cleaning System," *International Journals for Research*, p. 4014, 2019.
- [28] Rafi Zahedi 1, "Cleaning of Floating Photovoltaic Systems: A Critical Review on Approaches from Technical and Economic Perspectives," *Energies* , p. 5, 2021.
- [29] Jones et al., "Optimized Cleaning Cost and Schedule Based on Observed Soiling Conditions for Photovoltaic Plants in Central Saudi Arabia," in *IEEE Journal of Photovoltaics*," *IEEE JOURNAL OF PHOTOVOLTAICS*, pp. VOL. 6, NO. 3,, 2016.
- [30] Jaiganesh, "Enhancing the efficiency of rooftop solar photovoltaic panel with simple cleaning mechanism," *Materials Today: Proceedings (elsevier)*, p. 1, 2021.

- [31] Mallikarjun G. Hudedmani*, "A Comparative Study of Dust Cleaning Methods for the Solar PV Panels," *Advanced Journal of Graduate Research*, pp. pp. 24-29,, 2017.
- [32] Murat Altıntaş 1 and Serdal Arslan 2, "The Study of Dust Removal Using Electrostatic Cleaning System for Solar Panels," *Sustainability* , 2021.
- [33] M. Mazumder, M. Horenstein, J. Stark, P. Girouard, R. Sumner, B. Henderson and R. Sharma, "Characterization of electrodynamic screen performance for dust removal from solar panels and solar hydrogen generators. . Ind. Appl. 2013, 49,,," *IEEE Trans*, p. 49, 2013.
- [34] Brahmabhatt, "Review of yield increase of solar panels through soiling prevention, and a proposed water-free automated cleaning solution," *Contents lists available atScienceDirectRenewable and Sustainable Energy Reviews*, p. 3307, 2018.
- [35] Al Baloushi, "Portable robot for cleaning photovoltaic system: Ensuring consistent and optimal year-round photovoltaic panel performance," *Advances in Science and Engineering Technology Internatio*, 2018.
- [36] A. Kochan, "Robot cleans glass roof of Louvre pyramid," *Emerald insight*, vol. 32 No. 5, pp. 380-382, 2005 .
- [37] C. Menon, M. Murphy and M. G. Sitti, "inspired surface climbing robots. In Proceedings of the 2004 IEEE International Conferenceon Robotics and Biomimetics," Shenyang, China, August 2004.
- [38] S. Aly, P. Gandhidasan, N. Barth and S. Ahzi, "Novel dry cleaning machine for photovoltaic and solar panels. In Proceedings of the 2015 3rd International Renewable and Sustainable Energy Conference (IRSEC)," Marrakech, Morocco, December 2015.
- [39] B. Stridh, "Evaluation of economical benefit of cleaning of soiling and snow in PV plants at three European locations.," in *38th IEEE Photovoltaic Specialists Conference*, Austin, 2012.
- [40] Mohamed Fathia, "Technical and economic assessment of cleaning protocol for photovoltaic power plants: Case of Algerian Sahara sites," *Solar Energy*, 2017.
- [41] Bashar Hammada, "Modeling and analysis of dust and temperature effects on photovoltaic systems' performance and optimal cleaning frequency: Jordan case study," *Renewable and Sustainable Energy Reviews*, 2018.
- [42] M. K. Mohammed Al-Housani, "Assessment of Various Dry Photovoltaic Cleaning Techniques and Frequencies on the Power Output of CdTe-Type Modules in Dusty Environments," *Sustainability*, p. 13, 2019.
- [43] C. W. Lipp, "Practical Spray Technology: Fundamentals and Practice," 2012.